

# Mitutoyo

Mitutoyo Quality

Portable Surface Roughness Tester

## SURFTEST SV-3200 Series

New Options Enhance Multifunctionality and User-friendliness for Higher Throughput

FORM MEASUREMENT



# Surface Measuring System

## SURFTEST

### SV-3200 Series

#### Features

- This high-accuracy, multi-functional stylus type 2D surface roughness tester delivers best-in-class positioning speed (X-axis: up to 80mm/s, Z-axis: up to 30mm/s).
- Powerful options added to the accessory lineup allow a big reduction in total setting, measurement and evaluation time required.




#### New Option 1 3D Surface Roughness Measurement

It is capable of 3D Surface Roughness/Contour measurement and analysis\*1 by using X-direction 2D measurement data and high accurate Y-axis positioning table, 3D/Y-axis table\*2.

\*1 Require option software FORMTRACEPAK-PRO or MCubeMap

\*2 Does not support Y-direction 2D measurement and X/Y-direction inclined measurement.

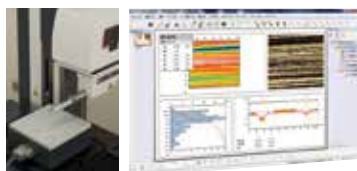

#### New Option 2 Easy Drive Unit Alignment

Optional accessory that tilts the drive unit to allow its easy alignment with a large or heavy workpiece that cannot be mounted on the auto-leveling table.




#### New Option 3 Adaptable Detector Orientation

Optional holders are available that allow manual change of the detector's orientation.

##### Optional Detector Holders

Code	Type	Remarks
S-3000	-	Standard accessory
S-3000C	Crank	Option
S-3000CR	Crank, upward	Option
S-3000MR	Upward	Option, long type

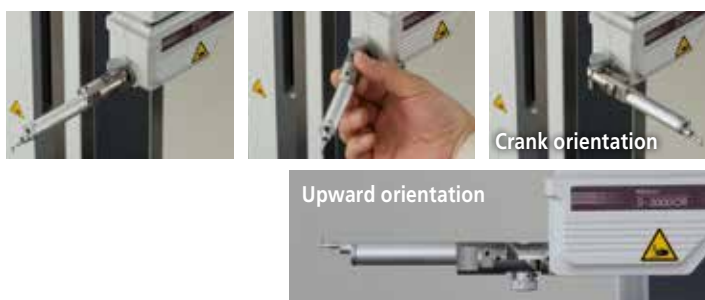

The crank orientation enables surface roughness measurement of a crankshaft (in the axial direction).

The upward/downward orientation enables roughness measurement on an upper/lower surface of a hole without needing an extra setup. Furthermore, S-3000MR provides a 100mm longer reach than the other holders, thus enabling measurement in a deep hole (in its upward or downward orientation).

#### Specifications

Model No.	SV-3200S4	SV-3200H4	SV-3200W4	SV-3200S8	SV-3200H8	SV-3200W8
Measuring range	100mm			200mm		
X-axis						
Z1-axis (detector)	800µm / 80µm / 8µm					
Z2-axis (column) traverse range	300mm	500mm	300mm	500mm		
X-axis inclination angle	±45° (only for a model with the X-axis leveling device)					
Detector detection method	Differential inductance					
Resolution	0.05µm					
X-axis						
Z1-axis (detector)	0.01µm, 0.001µm, 0.0001µm					
Z2-axis (column)	1µm (ABS scale)					
Drive speed	0 to 80mm/s and manual operation					
X-axis						
Z2-axis (column)	0 to 30mm/s and manual operation					
Straightness	(0.05+0.001L) µm			(0.1+0.002L) µm		
Measuring force	Depends on model No. (suffix -1: 0.75mN; -2: 4mN)					
Stylus tip	Depends on model No. (suffix -1: 60°, R2µm; -2: 90°, R5µm)					
Base size (width x depth)	600x450mm		1000x450mm	600x450mm		1000x450mm
Base material	Gabbro					

# Mitutoyo

Mitutoyo Asia Pacific Pte. Ltd.

Company Reg No. 197800892N

24 Kallang Avenue, Mitutoyo Building, Singapore 339415

Tel: (65) 6294 2211 Fax: (65) 6299 6666

E-mail: [mapsg@mitutoyo.com.sg](mailto:mapsg@mitutoyo.com.sg)

[www.mitutoyo.com.sg](http://www.mitutoyo.com.sg) | [www.mitutoyo.com.my](http://www.mitutoyo.com.my)

[www.mitutoyo.com.th](http://www.mitutoyo.com.th) | [www.mitutoyo.co.id](http://www.mitutoyo.co.id)

[www.mitutoyo.com.vn](http://www.mitutoyo.com.vn) | [www.mitutoyo.com.ph](http://www.mitutoyo.com.ph)



##### Mitutoyo (Malaysia) Sdn. Bhd.

Mah Sing Integrated Industrial Park,  
4, Jalan Utarid U5/14, Section U5,  
40150 Shah Alam, Selangor, Malaysia  
Tel: (60) 3-7845 9318  
Fax: (60) 3-7845 9346

E-mail: [mmsb@mitutoyo.com.my](mailto:mmsb@mitutoyo.com.my)

##### Penang Branch

Tel: (60) 4641 1998 Fax: (60) 4641 2998

E-mail: [mmsbpen@mitutoyo.com.my](mailto:mmsbpen@mitutoyo.com.my)

##### Johor Branch

Tel: (60) 7352 1626 Fax: (60) 7352 1628

E-mail: [mmsbjhr@mitutoyo.com.my](mailto:mmsbjhr@mitutoyo.com.my)

##### Mitutoyo (Thailand) Co., Ltd.

76/3-5, Chaengwattana Road, Kwaeng  
Anusaawaree, Khet Bangkaen,  
Bangkok 10220, Thailand  
Tel: (66) 2080 3500  
Fax: (66) 2521 6136

E-mail: [office@mitutoyo.co.th](mailto:office@mitutoyo.co.th)

##### Chonburi Branch

Tel: (66) 2080 3563 Fax: (66) 3834 5788

##### Amata Nakorn Branch

Tel: (66) 2080 3565 Fax: (66) 3846 8978

##### PT. Mitutoyo Indonesia

Jalan Sriwijaya No.26  
Desa cibatu  
Kec. Cikarang Selatan  
Kab. Bekasi 17530, Indonesia  
Tel: (62) 21-2962 8600  
Fax: (62) 21-2962 8604

E-mail: [ptmi@mitutoyo.co.id](mailto:ptmi@mitutoyo.co.id)

##### Mitutoyo Vietnam Co., Ltd.

No. 07-TT4, My Dinh - Me Tri Urban Zone,  
My Dinh 1 Ward, Nam Tu Liem District,  
Hanoi, Vietnam  
Tel: (84) 4-3768 8963  
Fax: (84) 4-3768 8960

E-mail: [mvc-hn@mitutoyo.com.vn](mailto:mvc-hn@mitutoyo.com.vn)

##### Ho Chi Minh City Branch

Tel: (84) 8-3840 3489

Fax: (84) 8-3840 3498

E-mail: [mvc-hcmc@mitutoyo.com.vn](mailto:mvc-hcmc@mitutoyo.com.vn)

##### Mitutoyo Philippines, Inc.

Unit 2103, GMV Building 2,  
107 North Main Avenue,  
Laguna Technopark, Biñan,  
Laguna 4024, Philippines  
Tel: (63) 4-9544 0272  
Fax: (63) 4-9544 0272

E-mail: [mpi@mitutoyo.com.ph](mailto:mpi@mitutoyo.com.ph)